

WDS3000

全戶臭氧水 殺菌淨化系統

打開水龍頭，淨化同步完成



99.99%
高效殺菌



5秒
快速除菌



降解農藥
去除異味



無化學添加
安心使用



一台搞定日常用水

滿足全家多種用水需求



蔬果清洗
降解農藥殘留



食材 | 餐具
降低細菌汙染



玩具用品
日常玩具殺菌



異味處理
分解異味



一般家用型



最高 **1.0 ppm**

開啟 5 秒內

可超過 0.5 ppm*

日常家用

Vs



WDS3000 臭氧淨化器



最高 **2.0 ppm**

全戶・商用需求

大流量輸出・穩定高濃度

高濃度・高效能

* 家用型數值依實際使用條件而異，以上供參考

單點使用

一個出水點使用

使用
範圍

全戶供水

串接主水路，全屋用水

一般流量

流量小，供水有限

出水
流量

4000LPH大流量

大流量供水，穩定充足

單處使用

一次只能一處使用

使用
彈性

多處同時使用

廚房、浴室、洗衣、清潔等

水 + 電 · 即時生成臭氧水

EOG 臭氧電解技術



利用 EOG 技術，將水分子電解產生臭氧
即時生成，即時作用，殺菌後還原為水，無殘留更安心

臭氧水的日常應用



毛孩洗澡

臭氧水溫和潔淨毛髮與皮膚
幫助去除細菌、減少異味



去除細菌
降低皮膚問題



去除異味
保持清新



溫和安心
不刺激肌膚



毛孩用品清潔

臭氧水深入清潔用品
玩具、碗盆、寢具都更安心



臭氧殺菌隨身瓶



高效殺菌
減少細菌滋生



去除異味
清新無負擔



安心使用
不傷材質



從日常用水到毛孩清潔

臭氧水融入每天的清潔習慣，溫和呵護更安心

技術原理 安全認證

壁掛安裝・串接管線・全戶淨化用水



建議加裝

PP初過濾

先濾除泥沙雜質
再進行臭氧進化

全屋 × 商用 多元用水

居家 | 餐飲 | 營業場所皆適用

降低農藥殘留與生物膜形成，一機搞定多場合



餐飲洗滌



沐浴盥洗



衣物洗滌



衛浴沖洗



居家清潔

適用多種場所



餐飲業



居家場所



學校 | 幼兒園



公共廚房



團膳機構



商辦 | 辦公室


✓ 從日常到專業，守護每一處用水

技術原理 安全認證

EOG 電解技術 | 認證更安心

EOG 臭氧電解技術

水+電，即時生成臭氧水
高效殺菌・無化學添加

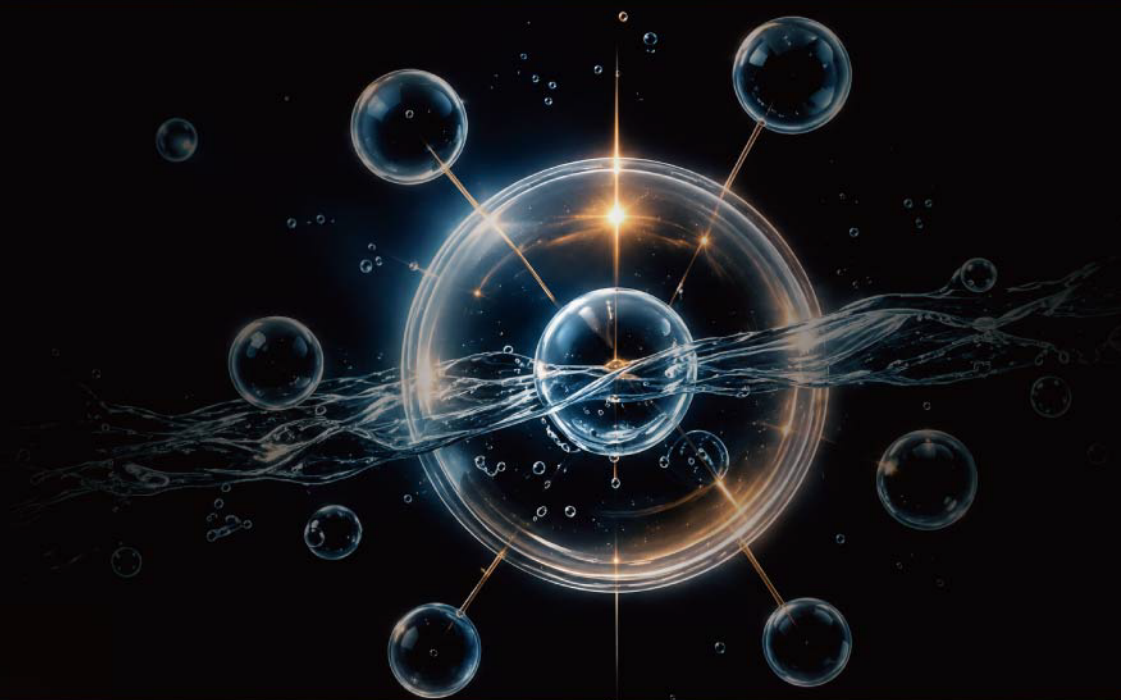

清潔不必 多一道程序

打開水龍頭，日常清洗同步完成



餐具



砧板



料理檯面



去除農藥



實測有據·安心看得見

多項日常情境實測 | 檢測結果清楚呈現

玩具清潔

99.99%

除菌效果

⌚ 實測時間15秒

手部清潔

99.99%

除菌效果




⌚ 實測時間15秒

抹布清潔

99.99%

除菌效果

⌚ 實測時間30秒

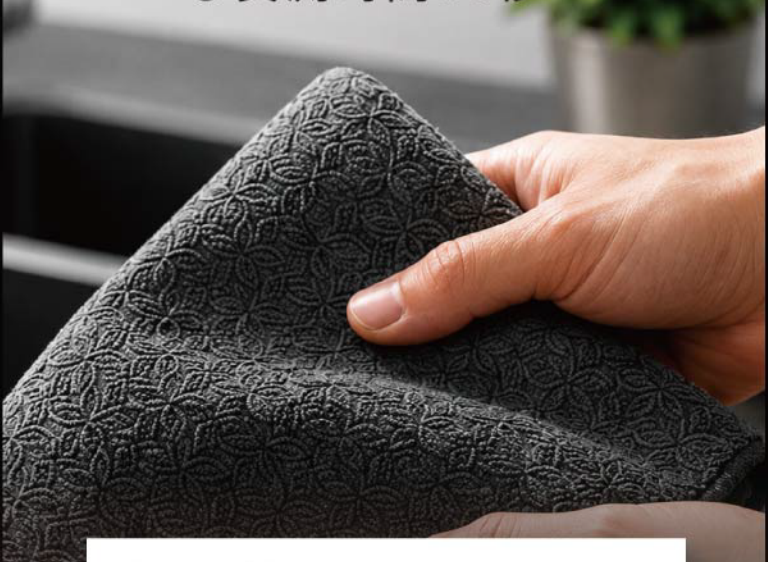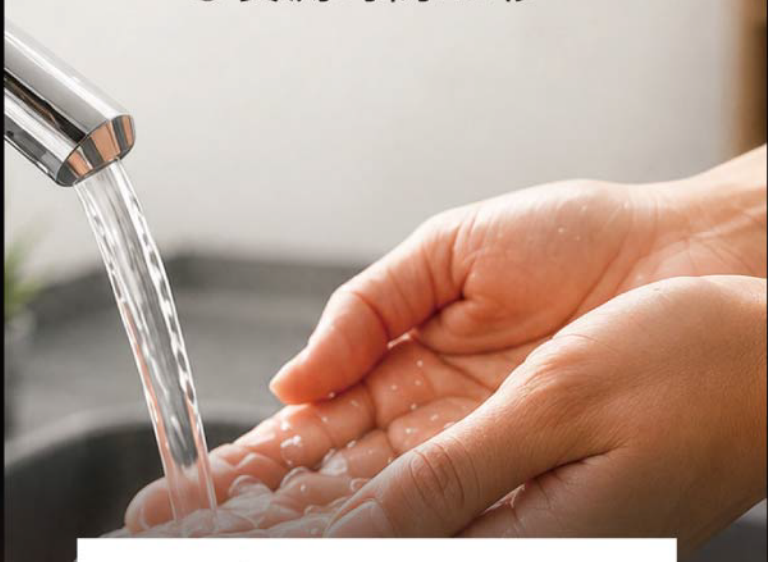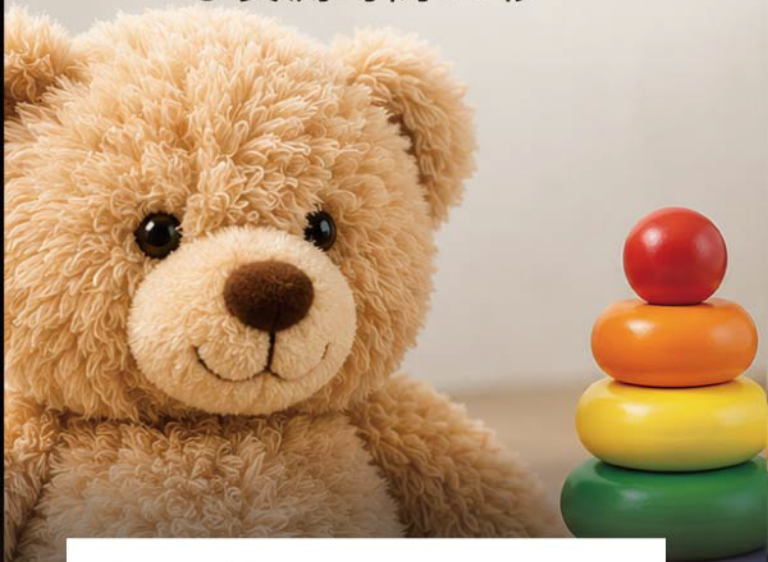

SGS					
Test Report					
No. HKGFD2000229102 Date: 30 Mar 2020 Page 2 of 2					
Test Results : Plastic Toy (Surface swab) - washed with Ozonated Water produced by BIOLUX WSS Ozonated Water System					
Antimicrobial Preservative - Effectiveness					
Organisms	Inoculum	15.seconds	30.seconds	60.seconds	
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml	<1 cfu/ml	<1 cfu/ml	
% Reduction		>99.99 %	>99.99 %	>99.99 %	
Log Reduction		>3	>3	>3	
Note : < = Less than > = Greater than cfu = colony forming unit					
*** End of Report ***					

SGS					
Test Report					
No. HKGFD2000229103 Date: 31 Mar 2020 Page 2 of 2					
Test Results : Human Hand (Surface swab) - washed with Ozonated Water produced by BIOLUX WSS Ozonated Water System					
Antimicrobial Preservative - Effectiveness					
Organisms	Inoculum	15.seconds	30.seconds	60.seconds	
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml	<1 cfu/ml	<1 cfu/ml	
% Reduction		>99.99 %	>99.99 %	>99.99 %	
Log Reduction		>3	>3	>3	
Note : < = Less than > = Greater than cfu = colony forming unit					
*** End of Report ***					

SGS					
Test Report					
No. HKGFD2000229104 Date: 31 Mar 2020 Page 2 of 2					
Test Results : Kitchen Cloth (Surface swab) - washed with Ozonated Water produced by BIOLUX WSS Ozonated Water System					
Antimicrobial Preservative - Effectiveness					
Organisms	Inoculum	30.seconds	60.seconds	5.mins	
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml	<1 cfu/ml	<1 cfu/ml	
% Reduction		>99.99 %	>99.99 %	>99.99 %	
Log Reduction		>3	>3	>3	
Note : < = Less than > = Greater than cfu = colony forming unit					
*** End of Report ***					

Organisms	Inoculum	15 seconds
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml
% Reduction		>99.99 %
Log Reduction		>3

Organisms	Inoculum	15 seconds
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml
% Reduction		>99.99 %
Log Reduction		>3

Organisms	Inoculum	30 seconds
Total Plate Count	3.8 X 10 ⁶ cfu/ml	<1 cfu/ml
% Reduction		>99.99 %
Log Reduction		>3

* 實際效果依使用條件而異

規格	介紹
尺寸 (mm)	深146.5 x 寬168 x 高273.9 (mm)
尺寸 (Inch)	深5.7" x 寬6.6" x 高10.8"
重量	3.0 kg (6.6 lb)
功率	100-240V AC, 50/60Hz (15V DC, 10.5A)
最大工作水壓	< 7 kg/cm ² (100 psi)
建議工作水壓	3 kg/cm ² (43 psi)
最大流量	4000 LPH (66.6LPM/17.6GPM)
連接管徑	1"
水質要求	潔淨水源 * ¹
最佳水溫	5 - 40°C (41 - 104°F)
防塵等級	IP55
臭氧水濃度	2.0 ppm * ² (approx.) (額定流量 @300LPH (1.3GPM))

